PLEASE RECYCLE

THIS DRAWING IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF ARCHITECTURAL RESOURCE TEAM, INC. THIS DRAWING MAY NOT BE REPRODUCED, OR REPRODUCTIONS HEREOF

IF THIS IS NOT 24"X36", IT IS A REDUCED PRINT - SCALE ACCORDINGLY

Door Schedule

Door Number	Type	Door					Hardware	Frame	Comments
		Width	Height	Thickness	Material	Finish		Material	
101a	A	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	101	HM	EXTERIOR NARROW LITE DOOR TYPE
101b	A	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	207	Timely ST	
102a	A	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	101	HM	EXTERIOR NARROW LITE DOOR TYPE
102b	A	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	207	Timely ST	
103a	A	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	101	HM	EXTERIOR NARROW LITE DOOR TYPE
103b	A	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	207	Timely ST	
104a	A	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	101	HM	EXTERIOR NARROW LITE DOOR TYPE
112	A	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	102	HM	
114a	A	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	102	HM	EXTERIOR NARROW LITE DOOR TYPE
114h	A	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	207	Timely ST	
201a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	208	Timely ST	
202a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	200	Timely ST	
203a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	201	Timely ST	
204a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	201	Timely ST	
205a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	201	Timely ST	
206a	A	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	103	HM	
206b	A	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	202	Timely ST	Provide keypad/fob access. Provide Laminated Glazing
207a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	203	Timely ST	
208a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	204	Timely ST	
301	B	3' - 0"	7' - 0"	0' - 1 3/4"	HM	PT	100	HM	
302a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	205	Timely ST	
303a	B	3' - 0"	7' - 0"	0' - 1 3/4"	WD	WD	206	Timely ST	

Window Schedule

Type Mark	Unit Dimensions		Type	Material	Finish	Glazing		Head Height	Window Treatment	Comments
	Width	Height				Thickness	Type			
1	2' - 6"	4' - 0"	Fixed	Alum	Silver	1"	Clear	7' - 0"		Interior
1	2' - 6"	4' - 0"	Fixed	Alum	Silver	1"	Clear	7' - 0"		Interior
1	2' - 6"	4' - 0"	Fixed	Alum	Silver	1"	Clear	7' - 0"		Interior
1	2' - 6"	4' - 0"	Fixed	Alum	Silver	1"	Clear	7' - 0"		Interior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
2	3' - 0"	4' - 6"	Window-Hopper-Duratherm-Wood	Alum	Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior
3	1' - 4"	4' - 0"	Fixed		Dark Bronze	1"	Clear	7' - 0"		
4	5' - 0"	3' - 0"	Fixed		Dark Bronze	1"	Clear	6' - 0"		Interior
16	3' - 0"	3' - 6"	Window-Hopper-Duratherm-Wood		Dark Bronze	1"	Solarban 60 (2) Optigray + Clear	7' - 3"		Opens to exterior

*PER THE IBC 1010.1.9 DOOR OPERATIONS. EXCEPT AS SPECIFICALLY PERMITTED BY THIS SECTION, EGRESS DOORS SHALL BE READILY OPENABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT.

Room Finishes

Level	Room Number	Room Name	Ceiling Finish	Base Finish	Floor Finish	Wall Finish	Comments
LEVEL 1	101	CLASSROOM 1	ACT	RB1	F1	P1/W1	
LEVEL 1	102	CLASSROOM 2	ACT	RB1	F1	P1/W1	
LEVEL 1	103	CLASSROOM 3	ACT	RB1	F1	P1/W1	
LEVEL 1	104	EHS CLASSROOM	ACT	RB1	F1	P1/W1	
LEVEL 1	111	TOILET ROOM	ACT	RB2	F2	P1/W2	
LEVEL 1	112	TOILET ROOM	ACT	RB2	F2	P1/W2	
LEVEL 1	113	TOILET ROOM	ACT	RB2	F2	P1/W2	
LEVEL 1	114	TOILET ROOM	ACT	RB2	F2	P1/W2	
LEVEL 1	201	FOOD PREP ROOM	ACT2	RB2	F2	P1/W3	
LEVEL 1	202	LAUNDRY	ACT	RB2	F2	P1/W2	
LEVEL 1	203	FSS OFFICE	ACT	RB1	F3	P1/W1	
LEVEL 1	204	AREA MANAGER	ACT	RB1	F3	P1/W1	
LEVEL 1	205	DIRECTORS OFFICE	ACT	RB1	F3	P1/W1	
LEVEL 1	206	VESTIBLE	ACT	RB1	F1	P1/W1	
LEVEL 1	207	COPY ROOM	ACT	RB1	F1	P1/W1	
LEVEL 1	208	RESTROOM	ACT	RB2	F2	P1/W2	
LEVEL 1	301	FIRE RISER	N/A	RB1	N/A	P1/W1	
LEVEL 1	302	IT RM	ACT	RB1	F1	P1/W1	
LEVEL 1	303	STRG	ACT	RB1	F1	P1/W1	
LEVEL 1	304	CORRIDOR	ACT	RB1	F1	P1/W1	

Appliance Schedule

ITEM	MANUFACTURER	MODEL NUMBER	DIMENSIONS (WxDxH)
Commercial Refrigerator			
Hot Boxes			
Washer			
Dryer			
Commercial Microwave			

Toilet Accessory Schedule

ITEM	MANUFACTURER	MODEL NUMBER	DIMENSIONS (WxDxH)
ADA Grab Bars			
Mirror			
Toilet Paper Dispenser			
Soap Dispenser			

Wall Schedule - Interior

Type Mark	Description	Fire Rating	Width	Construction Type	Comments
1	5/8" type X gyp. bd., 2 x 4 stud wall fully insulated where needed, 5/8" type X gyp bd.		0' - 4 3/4"		
1a	5/8" type X Gyp. Bd., 2 x 4 stud wall fully insulated where need		0' - 4 1/8"		
2	5/8" type X Gyp. Bd., 2 x 6 stud wall fully insulated where needed, 5/8" type X Gyp Bd.	1-HR (if req'd)	0' - 6 3/4"		

Wall Schedule - Exterior

Type Mark	Description	Fire Rating	Width	Construction Type	Comments
3	8" x 8"x 16" CMU wall running bond	2-HR (if req'd)	0' - 7 5/8"		
4	3/8" lath and stucco section, 1" rigid insulation, moisture barrier, 1/2" Sheathing 2 x 6 stud wall fully insulated where needed, 5/8" type X gyp. bd.		0' - 8"		
5	1 1/2" metal panel, 1" rigid insulation, moisture barrier, 1/2" Sheathing, 2 x 6 stud wall fully insulated where needed, 5/8" type X Gyp. Bd.		0' - 9 1/8"		

Roof Schedule

Type Mark	Description	Comments
	Corrugated metal roof	
1	Open web truss per structural with R-38 spray foam, 1/2" sheathing, TPO roof system.	

Floor Schedule

Type Mark	Description	Comments
1	Vapor barrier under interior spaces, 4" Concrete Slab on Grade	

Ceiling Schedule

Type Mark	Description	Comments
1	2' x 2' Tegular Acoustic tile ceiling on metal grid supported by wire hangers.	

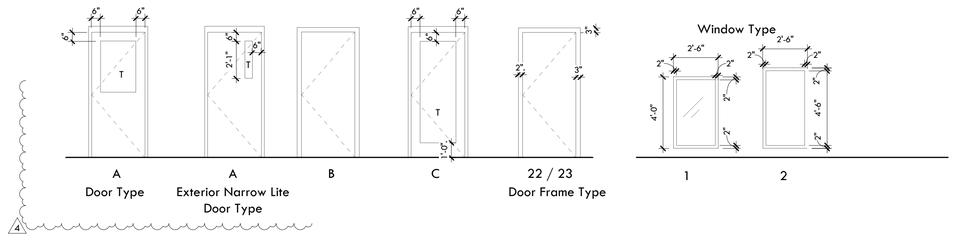

FINISH LEGEND

FLOOR

F1	LVT - SHAW CONTRACT - INLET STYLE# 0926V COLOR: REFUGE #26155
F2	SHEET VINYL - FORBO - MARMOLEUM, CONCRETE COLOR: ASTERIOD, #3732
F3	CARPET TILE - SHAW CONTRACT GROUP - GLITCH TILE #5T128, COLOR: DIGITAL #26401

BASE

RB1	6" RUBBER BASE - TARKETT, COLOR: WETLANDS #TH3, PROFILE: COVE BASE.
RB2	6" SEAMLESS VINYL BASE - MARMOLEUM - CONCRETE COLOR: ASTERIOD #3732, WELDED SEAMS. PROVIDE 3/8" RADIUS COVE STICK.
RB3	RUBBER BASE - TARKETT, COLOR: INKWELL #TH3, PROFILE: COVE BASE.

WALLS

W1	GYPSUM BOARD W/LIGHT ORANGE PEEL TEXTURE 70/30.
W2	FRP TO 48" A.F.F. @ ALL WALLS.
W3	FRP FULL HT. @ ALL WALLS.

CEILINGS

ACT	ROCKFON 24" x 24" PACIFIC SL260, STONEWOOL CEILING TILE, TEGULAR, COLOR: WHITE
ACT2	WASHABLE CEILING PANELS @ FOOD PREP

PAINT (BASED ON DUNN EDWARDS)

P1	PAINT - WALL FIELD COLOR: SO CHIC DET614, EPOXY SATIN FINISH, UNLESS NOTED OTHERWISE.
P2	PAINT - SOFFIT AND CEILINGS: COLOR: COOL DECEMBER, FLAT FINISH.
P3	PAINT - HM FRAMES - COLOR AS SELECTED BY OWNER.
P4	PAINT AT STEEL COLUMNS AND SHADE CANOPIES - COLOR AS SELECTED BY OWNER.
P5	PAINT AT STUCCO - COLOR AS SELECTED BY OWNER.

PLASTIC LAMINATE

PL1	BASE CABINETS & UPPER - WILSONART LAMINATE, COLOR: AS SELECTED BY ARCHITECT
PL2	PLASTIC LAMINATE COUNTER TOP - WILSONART, COLOR: AS SELECTED BY ARCHITECT.

MISC

QRZ	QUARTZ SOLID SURFACE AT WET COUNTERTOPS - DELLA TERRA, COLOR: GRIGIO NUBE
FRP -1	FRP WALL PANELS - CRANE, FINISH: LINEN, COLOR: WHITE (RESTROOMS)
FRP -2	FRP WALL PANELS - CRANE, FINISH: SMOOTH, COLOR: WHITE (CLASSROOM & PARENT BOARDS)

2504 S 91 st Ave, Tolleson, Az 85353

Just. design with purpose 1055 E. Indian School Rd., Phoenix, AZ 85014-4811 v | 602-307-5399 www.art-team.com

ARCHITECTURAL RESOURCE TEAM

Catholic Charities
Westside Head Start - Tolleson

CONSTRUCTION DOCUMENTS

Revision Schedule

No.	Date	Description
1	08.02.23	City of Phoenix Comments
4	09.29.23	Owner Comments

ART PROJECT NO.
22025

DATE
04.21.2023

REGISTERED ARCHITECT
CERTIFICATE NO.
36769
DOUGLAS L. MCCORD
DATE SIGNED
ARIZONA, U.S.A.
Expires 09/30/2025

DRAWING TITLE
SCHEDULES

DRAWING
A8.11